
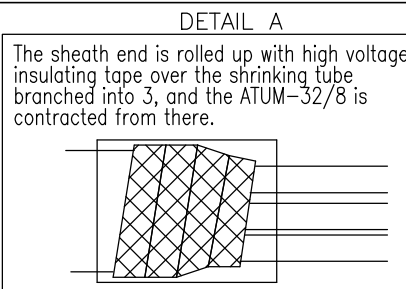


ATUM-12/4(20mm)INCREASE CABLE OUTER DIAMETER (x3)

LEFT SIDE
HOUSING : 1419229(x3)
CONTACT INSERT : 1418626(x3)
CABLE GLAND : 1411163(x3)
CRIMP CONTACT : CK1.6-ED-1.50BU [Male](x18)
CODING ELEMENT : 1409435(x3)

ATUM-12/4(20mm) INCREASE CABLE OUTER DIAMETER (x3)

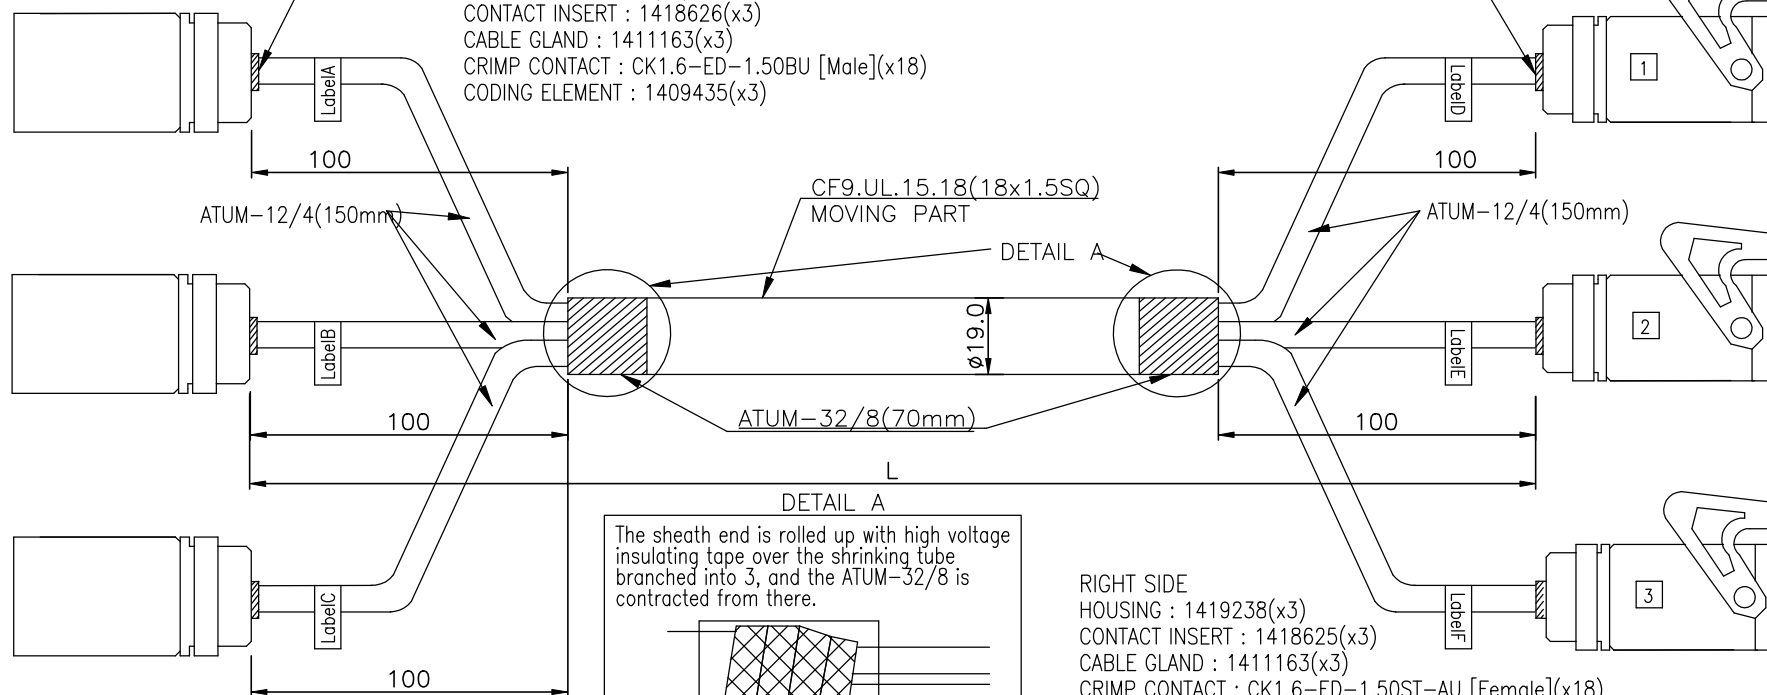

RIGHT SIDE
HOUSING : 1419238(x3)
CONTACT INSERT : 1418625(x3)
CABLE GLAND : 1411163(x3)
CRIMP CONTACT : CK1.6-ED-1.50ST-AU [Female](x18)
CODING ELEMENT : 1409435(x3)

1

12	E	11
10	R	9
8	7	6
4	3	2
BK4	BK3	BK1


2

12	E	11
10	R	9
8	7	6
4	3	2
BK10	BK9	BK7

3

12	E	11
10	R	9
8	7	6
4	3	2
Y/G	BK15	BK13

▲ : CODING ELEMENT

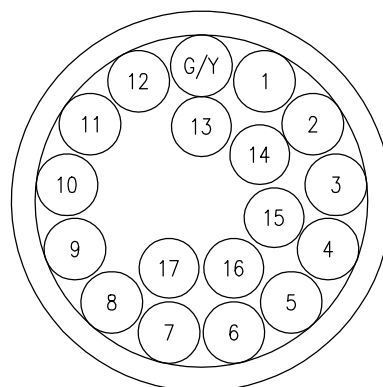

CF9.UL.15.18(18x1.5SQ)

1

11	E	12
9	R	10
5	6	7
BK5	BK6	
1	2	3
BK1	BK2	BK4

2

11	E	12
9	R	10
5	6	7
BK11	BK12	
1	2	3
BK7	BK8	BK10

3

11	E	12
9	R	10
5	6	7
BK16	BK17	
1	2	3
BK13	BK14	Y/G

▲ : CODING ELEMENT

USED WIRE ROD	USED WIRE No.	MISSING No.
CF9.UL.15.18(18x1.5SQ)	BK1-BK17.Y/G	

- NOTE
- 1 Length(mm) to be separately instructed.
 - 2 Refer to the table for labels.
 - 3 A missing wire number to be cut in the root of sheath.

MOTOR MOVABLE JUNCTION CABLE(POWER) WATERPROOF CONNECTOR
TYPE : FMS18-0515-U026